



DATA SHEET
NYACOL® AL25, AL25-HP

NYACOL® Colloidal Alumina
High Temperature Coating / Binder

NYACOL® AL25, AL25-HP

NYACOL® AL25 and AL25-HP have been developed utilizing new innovative technology for colloidal alumina. AL25 and AL25-HP are colloidal dispersions of boehmite with dispersed sizes of 70–80 nm at 20% Al₂O₃ content. Typically AL25 will have up to 500 ppm Na content and AL25-HP has less than 100 ppm Na. The sols are essentially chloride free and other impurities are low.

These products are used as binders for high temperature refractories and ceramics, catalyst wash-coats, catalyst formulation, precision polishing and paper coating.

Figure 1 shows a typical particle size curve using a Malvern Zetasizer. Figure 2 shows the typical XRD pattern for the boehmite after drying at 105°C.

TYPICAL PROPERTIES

	AL25	AL25-HP
(AlO(OH)), wt%	23.5	23.5
Aluminum content expressed as Al ₂ O ₃ , wt%	20	20
Particle Size, nm	70 - 80	70 - 80
Particle Charge	+	+
pH	4.0	4.0
Specific Gravity	1.19	1.19
Viscosity, cP	10	10
Sodium, ppm	<500	<100

PACKAGING

NYACOL® AL25 and AL25-HP are available in 55-gallon plastic drums or stainless steel tank trucks. Customized packaging is available.

STORAGE

NYACOL® AL25 and AL25-HP should not be subjected to temperatures of 32°F or below to avoid freezing.

SAFETY

NYACOL® AL25 and AL25-HP are acidic and may cause eye and skin irritation. Users should observe precautions printed on the package label. A Material Safety Data Sheet for this product will be supplied on request.

FIGURE 1: TYPICAL AL25 PSD


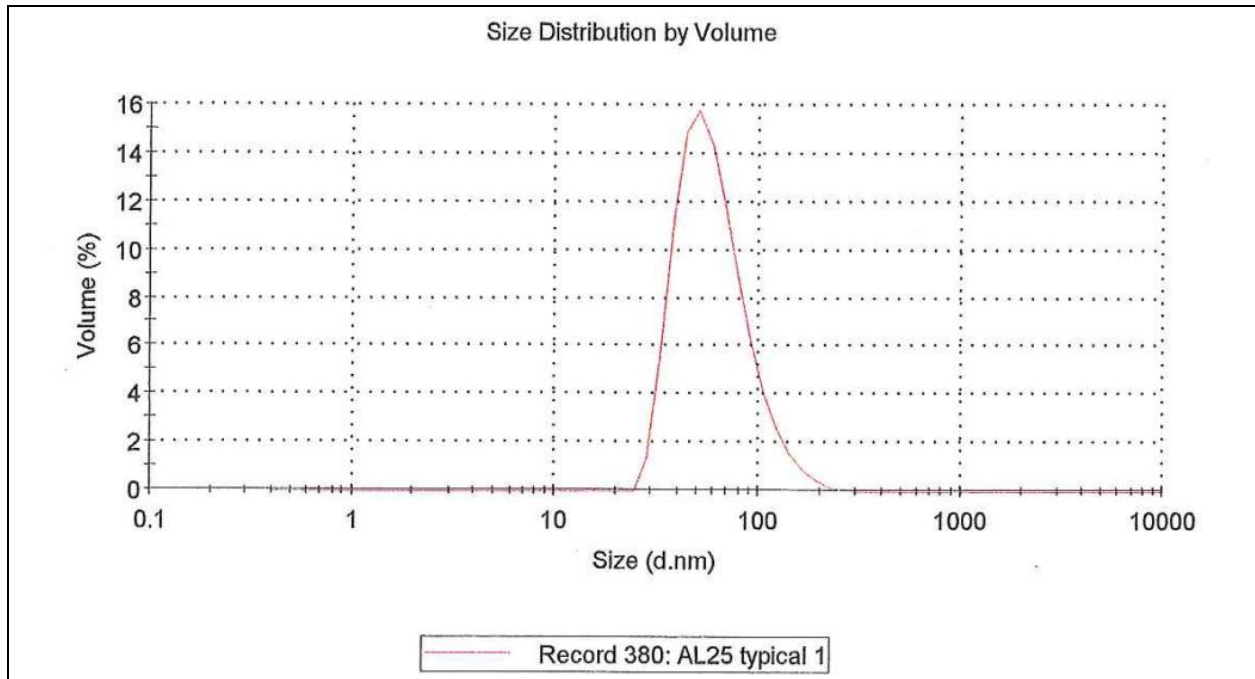


FIGURE 2: AL25 TYPICAL XRD



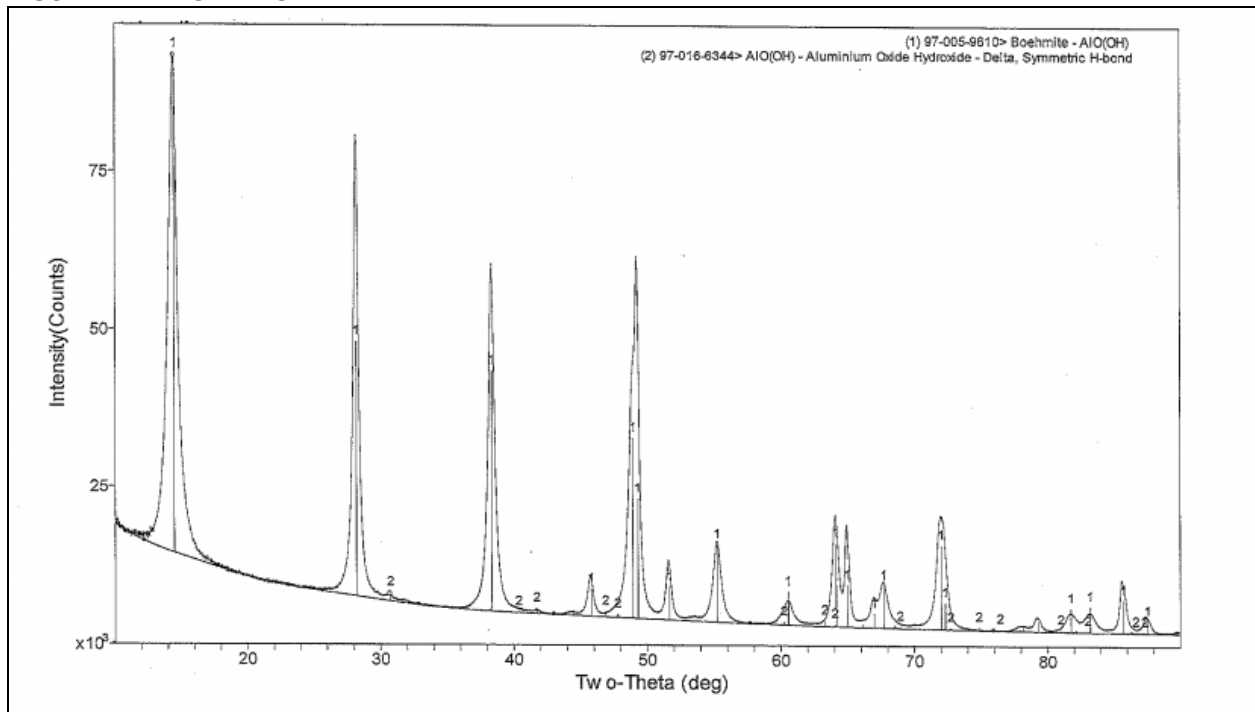

DATA SHEET
NYACOL® AL25, AL25-HP

FOR ADDITIONAL INFORMATION OR TO PLACE AN ORDER

Nyacol Nano Technologies, Inc.
Megunko Road
P.O. Box 349
Ashland, MA 01721-0349 U.S.A.

Telephone: 508-881-2220
Toll-Free: 800-438-7657
Fax: 508-881-1855
Internet: www.nyacol.com

Information herein is accurate to the best of our knowledge. Suggestions are made without warranty or guarantee of results. Before using, user should determine the suitability of the product for the intended use and user assumes the risk and liability in connection therewith. We do not suggest violation of any existing patents or give permission to practice any patented invention without a license.
09/2012

NYACOL is a trademark of Nyacol Nano Technologies, Inc.
P.O. Box 349, Ashland, MA 01721-0349 USA Tel.: 508-881-2220